



Packing Gauge AMG S

It indicates direct and immediately the height of the blanket or the plate over the bearer or measuring ring of cylinders shorter than 350 mm.

The device is easy to handle and operate and does not damage blanket or plate. It can even be used with restricted access to the cylinders.



**Polygraphische innovative
Technik Leipzig**

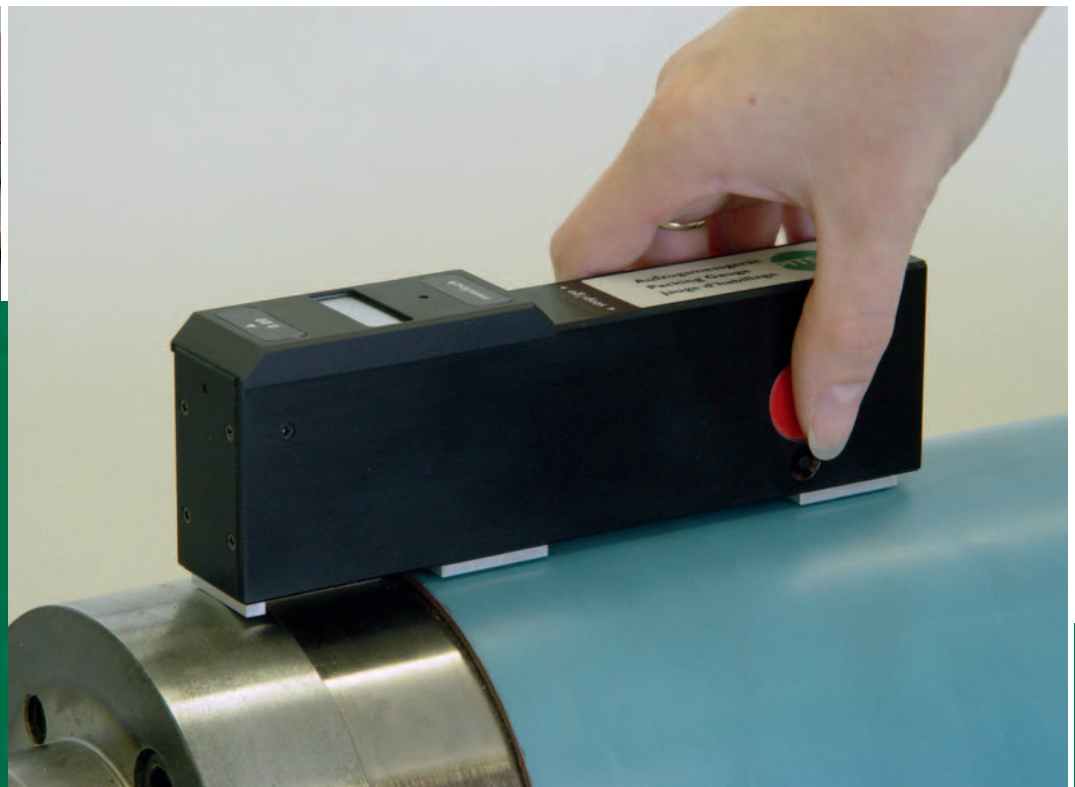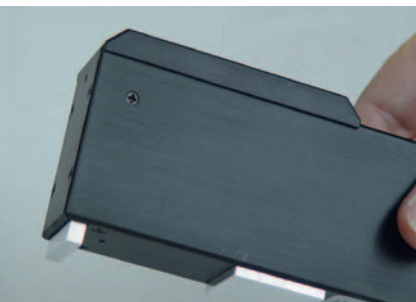



Packing Gauge

AMG S

Working principle

The device is held with one hand and set on the blanket or plate. The measured value is fixed with the hold function and can be read outside the press. It is digitally indicated with an accuracy of 1/100 mm.

Measuring can be made on cylinders with any diameter. Due to the measuring principle only a good eye is necessary to achieve parallelism when setting the device on the cylinder. Likewise individual pressure differences have no influence on the measuring result.



Together with SID Leipzig (Sächsisches Institut für die Druckindustrie GmbH) PITSID develops measuring and testing devices for the graphic arts industry. Our current range of products comprises instruments for the measurement and checking of contact pressure, register, UV-curing, nip, alcohol concentration IPA, packing height, plate punching, roller adjustment and stability of bookblock.

Polygraphische innovative Technik Leipzig GmbH

D-04329 Leipzig
Mommsenstraße 2
Tel +49 (0) 3 41 . 2 59 42-0
Fax +49 (0) 3 41 . 2 59 42-99
info@pitsidleipzig.com
www.pitsidleipzig.com

Technical data

Measuring range

-2.5 ... 2.5 mm

Range of application

Cylinders of any diameter

Measuring uncertainty

± 0.01 mm

Dimensions

175 x 55 x 30 mm

Weight

300 g

Operating temperature

15 °C ... 30 °C

Storage temperature

5 °C ... 40 °C

Voltage supply

1.5 V battery, Mignon type (AA)

Battery control

Battery change if „B“ appears on the display

Hold function

with stop/go button („H“ appears on the display)

Selection of unit of measurement

with the mm/inch button

Zero position

with 0.00 button (press for at least 1 sec)

Scope of delivery

Measuring device with battery, carrying case

Packing Gauge AMG M

It indicates direct and immediately the height of the blanket or the plate over the bearer or measuring ring of any diameter. The device is easy to handle and operate and does not damage blanket or plate. It can even be used with restricted access to the cylinders.



Polygraphische innovative
Technik Leipzig





Packing Gauge

AMG M

Working principle

The device is held with one hand and set on the blanket or plate. The measured value is fixed with the hold function and can be read outside the press. It is digitally indicated with an accuracy of 1/100 mm.

Measuring can be made on cylinders with any diameter. Due to the measuring principle only a good eye is necessary to achieve parallelism when setting the device on the cylinder. Likewise individual pressure differences have no influence on the measuring result.



Together with SID Leipzig (Sächsisches Institut für die Druckindustrie GmbH) PITSID develops measuring and testing devices for the graphic arts industry. Our current range of products comprises instruments for the measurement and checking of contact pressure, register, UV-curing, nip, alcohol concentration IPA, packing height, plate punching, roller adjustment and stability of bookblock.

Polygraphische innovative Technik Leipzig GmbH

D-04329 Leipzig
Mommsenstraße 2
Tel +49 (0) 3 41 . 2 59 42-0
Fax +49 (0) 3 41 . 2 59 42-99
info@pitsidleipzig.com
www.pitsidleipzig.com

Technical data

Measuring range

-1.5 ... 3.5 mm

Range of application

Cylinders of any diameter

Measuring uncertainty

± 0.01 mm

Dimensions

307 x 55 x 30 mm

Weight

450 g

Operating temperature

15 °C ... 30 °C

Storage temperature

5 °C ... 40 °C

Voltage supply

1.5 V battery, Mignon type (AA)

Battery control

Battery change if „B“ appears on the display

Hold function

with stop/go button („H“ appears on the display)

Selection of unit of measurement

with the mm/inch button

Zero position

with 0.00 button (press for at least 1 sec)

Scope of delivery


Measuring device with battery, carrying case

Packing Gauge AMG L

It indicates direct and immediately the height of the forme cylinder (varnish, flexography, letterpress) over the bearer or the measuring ring. The device is easy to handle and operate and does not damage the blanket or the forme.



**Polygraphische innovative
Technik Leipzig**

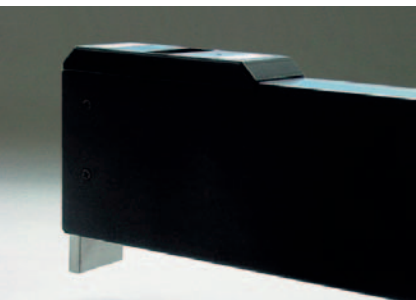



Packing Gauge

AMG L

Working principle

The device is held with one hand and set on the blanket or forme. The measured value is fixed with the hold function and can be read outside the press. It is digitally indicated with an accuracy of 1/100 mm.

Measuring can be made on cylinders with any diameter. Due to the measuring principle only a good eye is necessary to achieve parallelism when setting the device on the cylinder. Likewise individual pressure differences have no influence on the measuring result.



Together with SID Leipzig (Sächsisches Institut für die Druckindustrie GmbH) PITSID develops measuring and testing devices for the graphic arts industry. Our current range of products comprises instruments for the measurement and checking of contact pressure, register, UV-curing, nip, alcohol concentration IPA, packing height, plate punching, roller adjustment and stability of bookblock.

Polygraphische innovative Technik Leipzig GmbH

D-04329 Leipzig
Mommsenstraße 2
Tel +49 (0) 3 41 . 2 59 42-0
Fax +49 (0) 3 41 . 2 59 42-99
info@pitsidleipzig.com
www.pitsidleipzig.com

Technical data

Measuring range

-0.5 ... 13.5 mm

Range of application

Cylinders of any diameter

Measuring uncertainty

± 0.03 mm

Dimensions

500 x 65 x 30 mm

Weight

650 g

Operating temperature

15 °C ... 30 °C

Storage temperature

5 °C ... 40 °C

Voltage supply

1.5 V battery, Mignon type (AA)

Battery control

Battery change if „B“ appears on the display

Hold function

with stop/go button („H“ appears on the display)

Selection of unit of measurement

with the mm/inch button

Zero position

with 0.00 button (press for at least 1 sec)

Scope of delivery

Measuring device with battery, carrying case